

antonbauer®

One World. One Smart Choice.™



QBH HD


OPERATING INSTRUCTIONS

The Quad Battery Holder HD (QBH HD) is a versatile portable power accessory which allows seamless battery changes continuously powering any 15 or 30 volt (nominal) equipment. It is especially valuable in circumstances where equipment needs to be in continuous operation for long periods of time or for operating equipment demanding high currents (up to 12 amps). Cameras, monitors and portable field editors can be operated for as long a period as necessary, substituting fresh batteries for depleted ones without interrupting operation. As long as charged batteries are available, the equipment can be operated indefinitely.

OPERATION

- It is recommended that all four positions on the QBH HD be filled with batteries of the same model (Propac®, Trimpac® or Hytron™) for best performance.
- Use only 14.4 Volt Anton/Bauer® Propac®, Propac® Digital, Trimpac®, Trimpac® Digital or Hytron® batteries with the QBH HD. The QBH HD should not be used with 13.2 Volt batteries.
- Do Not Overload QBH HD: The QBH HD is equipped with a 12 amp resettable fuse for overload/short protection. If the fuse continues to open, check the equipment being powered for shorts. If there are no shorts on the equipment, call the Anton/Bauer Customer Service Department.
- Use batteries of the same voltage for optimum performance.
- Caution should be taken if using the QBH HD to power a light. Over discharging the batteries could be detrimental to the overall life of the batteries.
- Note polarity of output connector. When using a cable, be sure Pin #B (+) and Pin #A (-) are the same as the connector. See output connector diagram.

Note: Batteries should always be mounted filling the front first.

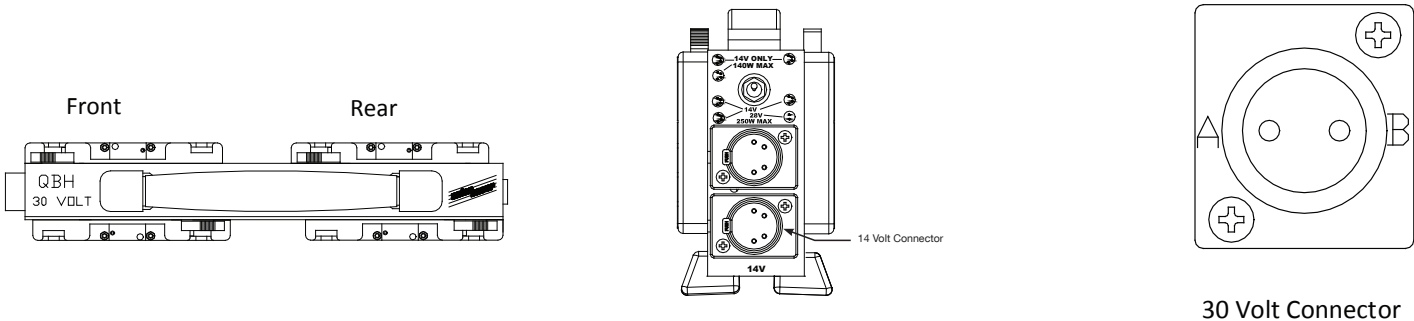

Switch in the up position is only the three 14 volt output connectors, 140 watts max (4 pin XLR's are 14 volts only)
Switch in the down position is 14 volt and 30 volt output connectors, 250 watts max
2 pin amphanol is 30 volts only

SERVICE/MAINTENANCE

DO NOT OPEN UNIT: There are no user serviceable parts inside. Any repairs to this unit other than by Anton/Bauer or its authorized service facilities may void warranty. Contact the Anton/Bauer Customer Support Department and/or for Service, send the equipment prepaid to: Anton/Bauer, Inc., Shelton, CT 06484, Attn: Customer Support Department

SPECIFICATIONS

| | |
|-----------------|-----------------|
| SIZE | 11½" x 5" x 2½" |
| WEIGHT | 1 lb. 12 oz. |
| MAXIMUM CURRENT | 12 Amps |

Use of unauthorized equipment in conjunction with Anton/Bauer products constitutes misuse under our warranties and may limit or void those warranties. Anton/Bauer does not authorize, condone, recommend, or otherwise assume any liability or responsibility resulting from the use of any battery, charger, or accessory made by Anton/Bauer manufacture with any battery, charger, or accessory not manufactured, produced or sold by Anton/Bauer. Anton/Bauer only authorizes the use of original Anton/Bauer product with this product.

The following are trademarks of Anton/Bauer, Inc.:

Anton/Bauer, Anton/Bauer logo and parallelogram design, Aspekt, Automatique, DataTap, DIONIC, Elipz, Egripz, Elightz, Essentialz, Gold Mount, HubZ, HyTRON, Impac, Interactive and design, LifeSaver, Logic Series, Logic Series Logo, Maxx man logo design, Nexus, PowerStrap, Proformer, Probe, ProPac, RealTime, Satelight, Snap-On, Stasis, Stasis Flex, Tandem, TrimPac, Ultrakit, Ultralight, "One World. One Smart Choice", "The power behind the best cameras capturing the best images in the world.", "The quality standard of the video industry", "The worldwide standard", and "There should always be choices. It makes it easier to recognize the best."

Lexan is a registered trademark of G.E. Company Corp.

Cordura is a registered trademark of E.I. duPont de Nemours

Anton/Bauer, Inc.

World Headquarters
14 Progress Drive, Shelton, CT U.S.A.
Tel (203) 929-1100 or (800) 541-1667
Fax (203) 929-9935
support@antonbauer.com

Anton/Bauer Europe, B.V.

Eurode Business Center, Eurode - Park 1-2
6461KB Kerkrade, The Netherlands
Tel (+31) 45 5639220
Fax (+31) 45 5639222
eurosupport@antonbauer.com

Anton/Bauer, Inc. - Singapore Office

6 New Industrial Road, # 02-02 Hoe
Huat Ind. Bld., Singapore 536199
Tel (+65) 62975784
Fax (+65) 62825235
asia@antonbauer.com

www.antonbauer.com

